


*POWER*TOME $\equiv$ *PCZ*TM

Ideal for Applications In:

- π a I-úŠNĀI-fā wŠāŠI-I-ŪÖK
- π [ĀFŠ {ŌŠyŌŠ
- π C2NŠyĀIŌ {ŌŠyŌŠ
- π vdzI-fĀŭē / 2yŪŪ2f
- π C I-ĀtdzNŠ !yI-fēāā

Designed for:

- π CĀI-yāYĀāā2y9fŠŌŪŪ2y a lŌN2āŌ2Lĭē
- π !ú2YĀŌ C2NŠŌŠ a lŌN2āŌ2Lĭē
- π {ŌI-yŷĀy tN2ŌŠ a lŌN2āŌ2Lĭē
- π {ŌI-yŷĀy 9fŠŌŪŪ2y a lŌN2āŌ2Lĭē
- π hLĪŪĀŌI-f a lŌN2āŌ2Lĭē
- π CŌLW

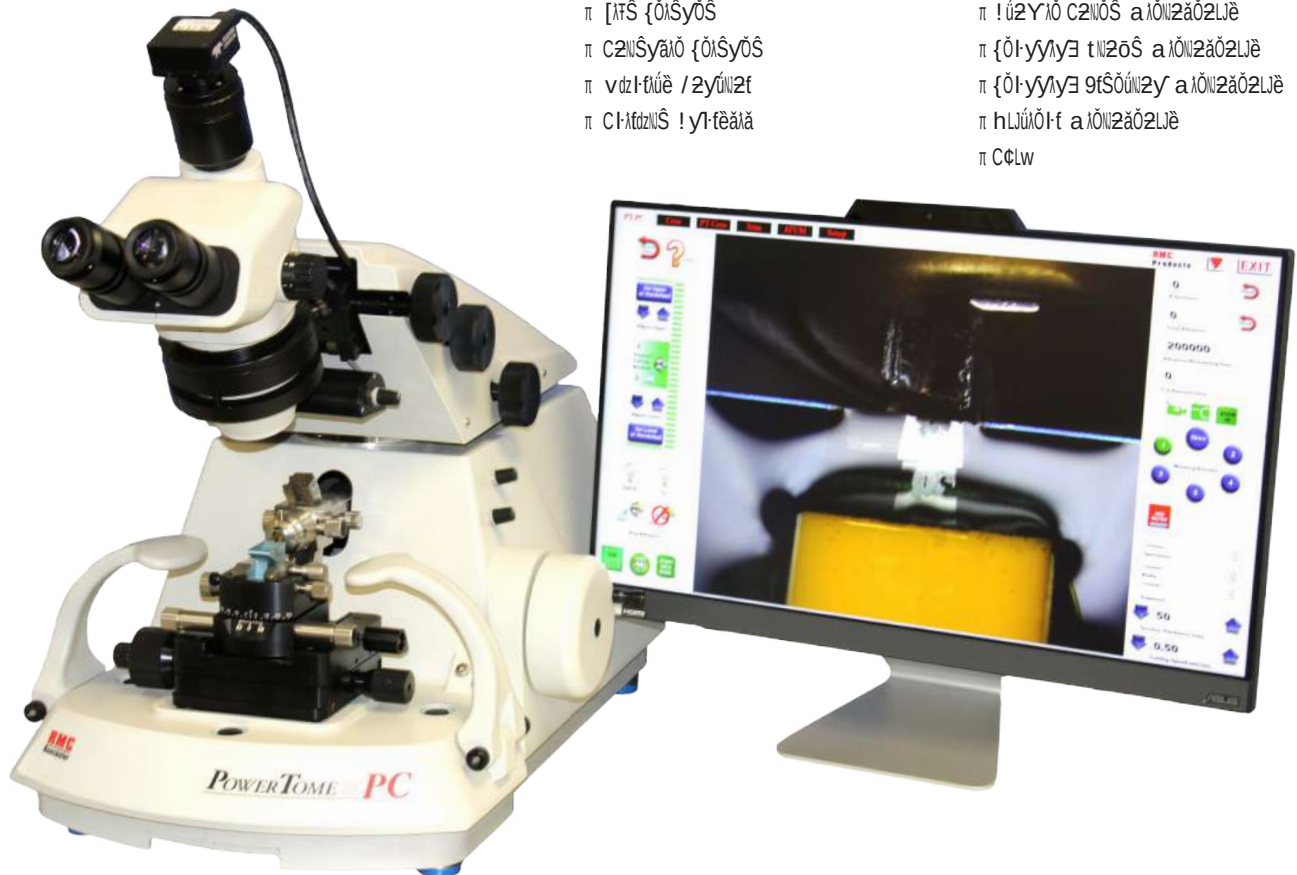

The Powerful Precision & Vision Ultramicrotome For Research & Education

ČKŠ tČt/½ TŠI-údzNŠā I- KĀK RŠTĀNĪā2y ŌĀRŠ2 LĪI-ŌĪI-ŠŠ ŌKŠNŠ ŪKŠ āŠŌŪā2yĀy LĪN2ŌŠāā Āā RĀĀĪfI-ēŠR ĀyNŠI-tŪĀYŠ I-ú ŪKŠ ŌŠyŪŠN 2f ŪKŠ Ō2YĪJdzŪŠN Y2yĪŪ2N 9ĪJdzĪJLŠR ŌĀŪK ŪKŠ āI-YŠ Ō2YĪJdzŪŠN Ō2yŪŪ2f ĀyŪŠNŪfI-ŌŠ I-ā ŪKŠ tČt/Š ŪKŠ tČt/½ ŠyI-ŌfŠā ŪKŠ ŌĀŠŌĀy I-yŔ NŠŌ2NŔĀy 2f ŪKŠ āŠŌŪā2yĀy LĪN2ŌŠāā ĀyTdzff I 5 T2N TdzŪdzNŠ ŌĀŠŌĀy I-yŔ dzāŠ

ČKŠ I-ftĀyŔ2yŠ Ō2YĪJdzŪŠN Ō2yŪŪ2fTŠN TŠI-údzNŠā I- āĀY RŠāĀy, t2dzŌK āŌNŠŠy Ō2yŪŪ2f Y2yĪŪ2N ĀyŌtdzĀy ŌNŠŠŠā Y2dzāŠ 9 ĪŠēŌ2I-NŔI ĀyŪŠNŌ2yŷŌŪ ŌI-ŌfŠā 9 I-ŌŌŠāā2NĀŠā !ff Ō2yŪŪ2f TdzŪŪā2yā ŌI-y ŌŠ I-ŌŪĀŌI-ŪŠR Ōē Ū2dzŌKĀy ŪKŠ Ō2yŪŪ2f Y2yĪŪ2N āŌNŠŠy 2N Ōē Y2dzāŠ ŠKĀŠ YI-ĀyŪI-ĀyĀy dzāŠ 2f ŪKŠ ŪI-ŌŪāŠ RĀĀĀI-f Ō2yŪŪ2fTŠN ČKŠ Ō2f2N Y2yĪŪ2N RĀĀĪfI-ēā I- ŌNĀKŪ I-yŔ dzāŠN TĀYŠŔfē Ō2yŪŪ2f ĀyŪŠNŪfI-ŌŠ ŌĀŪK ĀyŪdzĀŪŌŠ Ō2yŪŪ2f ĀŌ2yā t23ĀŌI-ftē I-NŪI-y3ŠR I-N2dzYŔ ŪKŠ ŌĀRŠ2 RĀĀĪfI-ē

±I-NĀ2dzā I-RŔŔ2y Ō2YĪJdzYŠyŪā T2N I-NŪI-ē Ū2Y23NŪI-LĪKē I-yŔ ŌNē2 I-LĪJĪŌI-Ūā2yā I-NŠ I-tā2 I-ŌI-ĀfI-ŌfŠ

FEATURES

- Produce high quality semi- and ultra-thin sections for TEM, SEM, block facing for AFM, TOFSIMS, LM, and CEMOVIS.
- Hybrid control system includes touch screen monitor with Visutrac™ cutting zone control, plus digital tactile controller
- High-definition video package showing work area with built-in video measuring system
- Record & save video clips & still images
- Built-in report generator, database, & diagnostic routines for automatic documentation of sectioning parameters
- Ergonomic stereo microscope system with unique lateral viewing control
- Four Types of LED illumination are provided. All are independently adjustable.

Overhead bright diffuse LED Illumination

Backlighting for careful approach of the knife to the specimen

Transillumination through the specimen holder for viewing details of the specimen within the block

(Transillumination LED can also be used for spot illumination by pointing it towards the specimen or knife edge)

- Patented Power Drive© cutting stroke for large blocks & hard materials
- Electronic step advance for final specimen approach to the knife edge
- High stability mechanical advance system for reproducible section thickness
- Built-in calibration & service diagnostics instantly confirm functionality & simplify maintenance procedures

SPECIFICATIONS

- Specimen auto feed: 0.2 mm (200 µm; 200,000 nm)
- Section thickness: 0nm to 15µm
- Cutting speed: 0.1 to 100mm/sec in 0.1mm/sec increments
Variable return speed over entire cutting speed range
- Knife stage movement: 50mm gross advance
25mm E-W travel
12mm N-S advance

INCLUDES**Steremicroscope Trinoculars ACCU-SCOPE 3075 Series**

- 7:1 zoom
- 6.7x to 45x magnification
- 10x WF (22mm) eyepieces
- phototube with 50/50% right path
- c-mount camera adaptor
- 45-degree viewing angle

Teledyne 2.1 megapixel USB-C 3.1 color camera

- with Sony IMX327 Rolling Shutter Sensor

Accessory Kit

- Transilluminated Specimen Holders (Universal, 8mm Stepped, and 7mm Flat)
- Arc Segment Holder
- Arc Mounting Stub
- Trimming Block
- Trimming Post
- 12" Transillumination LED
- Cable, fuses, wrenches

ACCEPTS THE FOLLOWING KNIVES

- Glass knives up to 12mm wide
- Triangular tungsten carbide knives
- Any commercial brand of diamond knives

OPTIONAL ACCESSORIES AVAILABLE FOR PURCHASE

ROOM TEMPERATURE SPECIMEN HOLDERS

- Vise type flat specimen holder.
- Universal transilluminated specimen holder.
- 7mm flat specimen transilluminated holder.
- 5.6mm flat specimen transilluminated holder.

OTHER POWERtome ACCESSORIES

- Static Line Ionizer
Ionization depolarization device, 115VAC or 220 - 240VAC
 - Breath shield, for knife stage
 - Water trough filler.
Includes reservoir/pump, tubing and filler tube
 - Specimen viewing mirror
Mounts on upper stage for straight-on viewing of specimen
 - Easy-Lift glass knife spacer and post.
 - PowerTome dust cover.
 - Automated water level control system
 - Stereomicroscope-mounted breath shield
- Maintains constant water level in knife boat, automatically adjusting as required. For use with PTPCZ, PT3D, ATUMtome.



STATIC LINE IONIZER, 110VAC or 220 - 240V



AUTOMATED WATER LEVEL CONTROL SYSTEM
(for use with PTPCZ, PT3D, ATUMtome)



WATER TROUGH FILLER
(PERISTALTIC WATER PUMP)